


# MP-60T Infusion Pump

The MP-60T Infusion Pump is SIMPLE, SOPHISTICATED, SMART, and SAFE.

The highly accurate MP-60T is compact, space-saving and easily portable. Convenient touch screen technology provides quick set up, adjustable brightness settings and a selection of background colours.

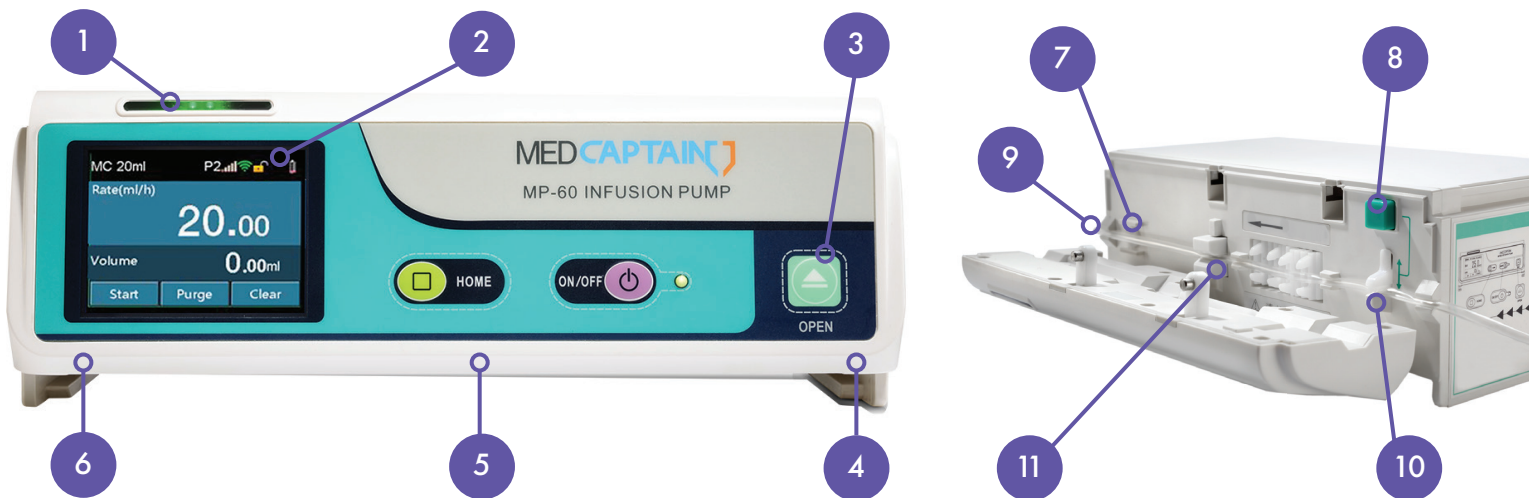

- 1 Alarm indicator
- 2 Touch screen operation
- 3 Automatic pump door
- 4 Stackable between any units in the MEDCAPTAIN MP range (11-5985 & 11-5990)
- 5 Optional docking station (allows relay functions)
- 6 2 year warranty
- 7 Pressure sensor
- 8 Anti-free flow clamp button

- 9 Tube holder
- 10 Anti-free flow clamp
- 11 Air bubble sensor



Pumps in the MP range can be connected and secured easily



A slide-on handle is supplied with every pump for portability



The MP-60T pumps can be clamped vertically or horizontally to suit

## Specifications:

Dimension:	202 (W) x 74 (H) x 133 (D) mm
Weight:	<1.22kg (including battery)
Compatibility:	All disposable infusion sets conforming to the ISO 8536-4 and ISO 8536-8 standards
Screen:	2.4" LCD touch-screen, 7 selectable colours
Battery:	Lithium 7.2v, 2600mAh
Battery duration:	> 5 hours (based on 25 ml/h with a new battery)
Event storage:	Up to 2000 events can be stored for review

Please Note: WIFI option available, please call our sales team for more information

Optional docking station  
(allows relay functions)



The optional docking station saves space, allows relay functions and also only utilises one plug socket, for multiple infusion units.

## Basic Parameter:

Infusion mode	Rate, Time, Weight, Sequence, Micro, Drip mode
Infusion rate range	0.1-1200.0ml/h (0.03-400 d/min.)
Increment	0.1 – 99.99 ml/h, (min. increment 0.01 ml/h) 100– 999.9 ml/h, min. increment 0.1 ml/h 1000-1200 ml/h, min. increment 1 ml/h
VTBI range	0.1 – 99.99 ml (minimum increment 0.01) 100 – 999.9 ml (minimum increment 0.1) 1000 – 9999 ml (minimum increment 1)
Pre-set time	00.00 – 99.59 (hh:mm) adjustable
Accumulated volume	0.0 – 999999.99 ml
Accuracy	±5%
KVO rate	0.1 – 5.0 ml/h adjustable, step by 0.01 ml/h, default rate: 1 ml/h
Bolus rate	0.1-1200 ml/h 3 bolus ways selectable: Automatic/ Manual/ Rapid quantitative Bolus
Purge range	1200.0 ml/h
Air-bubble detection	>25µl
Occlusion level	3 levels selectable, 300mmHg, 550mmHg, 900mmHg

01347 878697 | [sales@jakmarketing.co.uk](mailto:sales@jakmarketing.co.uk)  
[www.jakmarketing.co.uk](http://www.jakmarketing.co.uk)

J.A.K Marketing Limited Purfect House, 11-21 Dale Road, Sheriff Hutton, York, YO60 6RZ

Registered Company No. 4316591

